
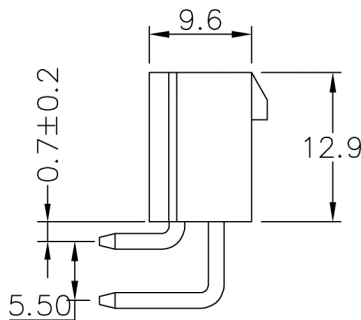


P.C.B. LAYOUT



所有材料為  
"環保材料"

2008.1.25

RoHS

## Specifications:

- Material:  
Housing: Nylon 66 UL 94V-2  
Contact: Brass, 1.14mm Square Pin/Tin-Plated
- Voltage Rating: 600V
- Current Rating: 9A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000M $\Omega$  min.
- Temperature Range: -40°C~+105°C
- Contact Resistance: Initial value/10m  $\Omega$  max.  
After environmental testing/20m  $\Omega$  max.

## Dimensional & Ordering Information:

Part No	Dimensions mm	
	A	B
CR-W421-02		5.40
CR-W421-04	4.20	9.60
CR-W421-06	8.40	13.80
CR-W421-08	12.60	18.00
CR-W421-10	16.80	22.20
CR-W421-12	21.00	26.40
CR-W421-14	25.20	30.60
CR-W421-16	29.40	34.80
CR-W421-18	33.60	39.00
CR-W421-20	37.80	43.20
CR-W421-22	42.00	47.40
CR-W421-24	46.20	51.60

DESCRIPTION(內容):  
4.2mm (.165") Mini-Fit,  
Power Connector/Header

PART NO:  
(料號) **CR-W421-XX**  
DWG NO(圖號): **4203-RT-XX**

DRAWN(製圖):  
**mandy**  
CHECKED(確認):  
**MANDY**  
APPROVAL(核准):  
**JOHNNY**

GENERAL TOLERANCE:  
(公差)  
.000 ±0.1  
.00 ±0.25  
.0 ±0.5  
SCALE(比例):  
**FREE**

REV:	REV	DESCRIPTION	DATE
<b>R4</b>			
UNIT:	<b>R0</b>	RELEASE	<b>2008.01.25</b>
<b>mm</b>	<b>R1</b>	補充尺寸 (A)	<b>2009.02.12</b>
SIZE:	<b>R2</b>	加大公差	<b>2009.04.15</b>
<b>A4</b>	<b>R3</b>	新增膠底至PIN針中心尺寸	<b>2014.02.26</b>
SHEET:	<b>R4</b>	2014年P數料號編碼統一	<b>2014.09.03</b>
<b>1/1</b>			