

所有材料為
"環保材料"
2009.2.24
RoHS

MATERAIL

Housing: Nylon 66, UL94V-2



Contact: Brass / Tin-Plated

Insulation Resistance: 1000MΩ min.

Withstand Voltage: 1500V AC/Minute

Current Rating: 9A AC/DC

Voltage Rating: 600V AC/DC

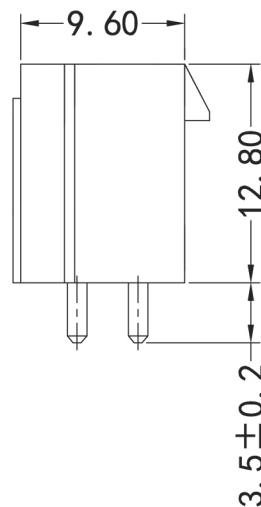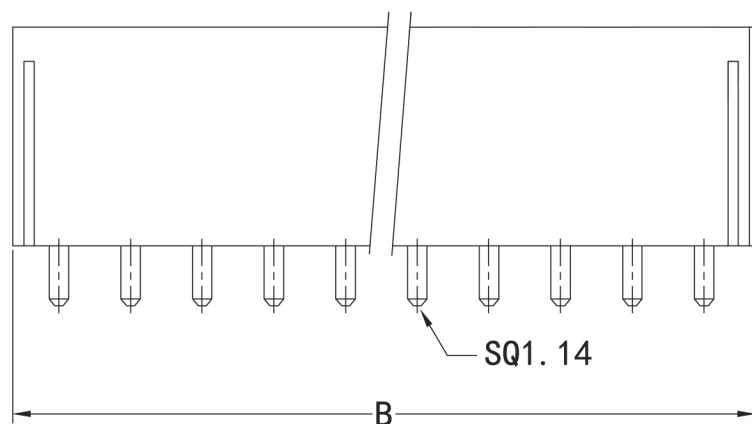

Dimensions

circuit	A	B	circuit	A	B
CR-W421S-02S	---	5.40	CR-W421S-14S	25.20	30.60
CR-W421S-04S	4.20	9.60	CR-W421S-16S	29.40	34.80
CR-W421S-06S	8.40	13.80	CR-W421S-18S	33.60	39.00
CR-W421S-08S	12.60	18.00	CR-W421S-20S	37.80	43.20
CR-W421S-10S	16.80	22.20	CR-W421S-22S	42.00	47.40
CR-W421S-12S	21.00	26.40	CR-W421S-24S	46.20	51.60

DESCRIPTION(內容):

4.2mm (.165") Mini-Fit,
Power Connector / Header

PART NO:
(料 號) CR-W421S-XXS

DWG NO(圖號): 4203-ST-XXA

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.000 ±0.1

.00 ±0.25

.0 ±0.5

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

2014年8月料號P編碼統一兩碼

DATE

2009.03.09

2015.01.26