




SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC
 Voltage Rating: 50V AC/ max.
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 100MΩ/ min.
 Dielectric Withstanding Voltage: 500V AC/ min.
 Contact Resistance: 20mΩ/ max.

Material

Material: PBT, UL94V-0

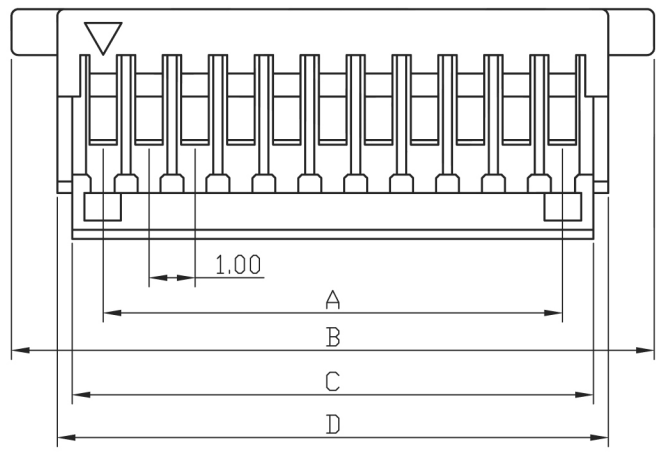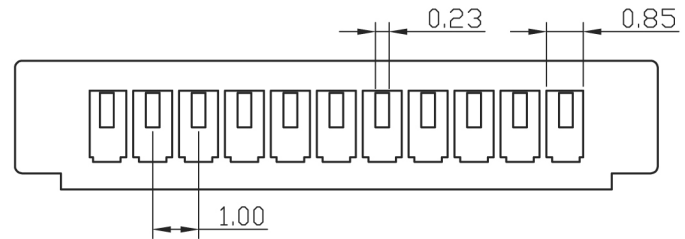

B尺寸公差如下:
 2P~10P±0.10mm
 11P~20P±0.20mm

所有材料為
 "環保材料"
 2006.08.09
 RoHS

Poles	Dimension mm				Note.
	A	B	C	D	
02	1.0	5.0	2.37	3.00	
03	2.0	6.0	3.37	4.00	
04	3.0	7.0	4.37	5.00	
05	4.0	8.0	5.37	6.00	
06	5.0	9.0	6.37	7.00	
07	6.0	10.0	7.37	8.00	
08	7.0	11.0	8.37	9.00	
09	8.0	12.0	9.37	10.00	
10	9.0	13.0	10.37	11.00	
11	10.0	14.0	11.37	12.00	
12	11.0	15.0	12.37	13.00	
13	12.0	16.0	13.37	14.00	
14	13.0	17.0	14.37	15.00	
15	14.0	18.0	15.37	16.00	
16	15.0	19.0	16.37	17.00	
17	16.0	20.0	17.37	18.00	
18	17.0	21.0	18.37	19.00	
19	18.0	22.0	19.37	20.00	
20	19.0	23.0	20.37	21.00	

DESCRIPTION(內容): 1.0mm Wire-to-Board Housing	DRAWN(製圖): Shih	GENERAL TOLERANCE:(公差) X.XX ± 0.1 X.X ± 0.25	REV: R2	REV	DESCRIPTION	DATE	
	CHECKED(確認): MANDY		UNIT: mm	R0		環保料	2006.08.09
	PART NO: (料號) CSH-H10-XX	APPROVAL(核准): JOHNNY	SCALE(比例): FREE	SIZE: A4	R1	修改接觸阻抗單位	2007.04.04
	DWG NO(圖號): 1000-XX			SHEET: 1/1	R2	2014年料號Pin數編碼統一	2014.10.09
				R3			