

**A****B****C****D****E**

# Specifications

Current Rating: 5A AC, DC





Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C

Contact Resistance: 10m Ω Max

Insulation Resistance: 1000M Ω Min

Material: Nylon 66, UL94V-0

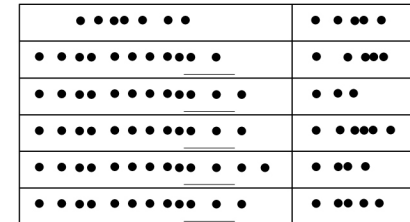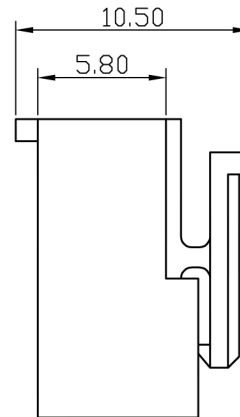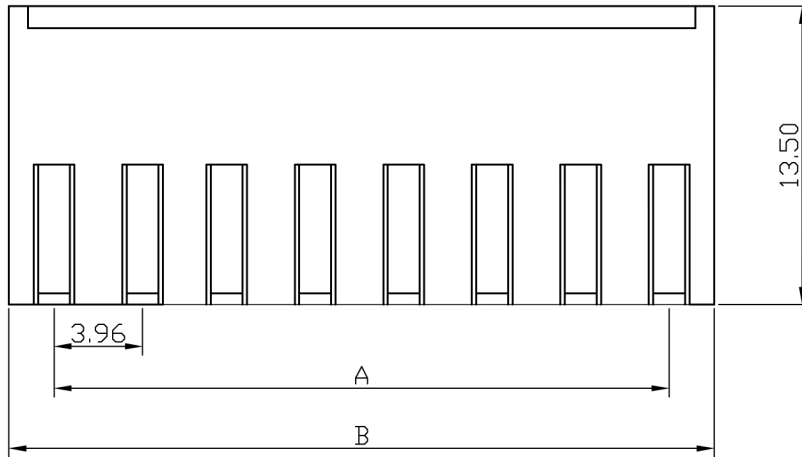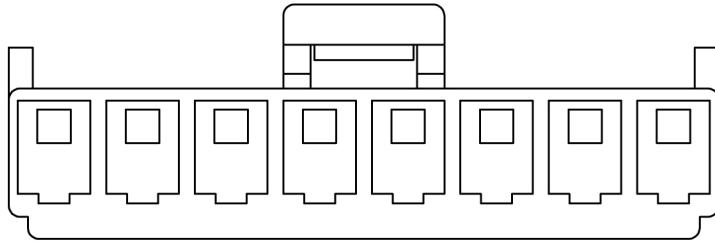

Poles	Dimension mm (in.)	
	A	B
02	3.96 (0.156)	8.04 (0.317)
03	7.92 (0.312)	12.10 (0.476)
04	11.88 (0.468)	15.96 (0.628)
05	15.84 (0.624)	20.00 (0.787)
06	19.80 (0.780)	23.90 (0.941)
07	23.76 (0.935)	27.90 (1.098)
08	27.72 (1.074)	31.86 (1.254)
09	31.68 (1.247)	35.88 (1.413)
10	35.64 (1.403)	39.84 (1.569)
11	39.60 (1.559)	43.74 (1.722)
12	43.56 (1.715)	47.74 (1.880)
13	47.52 (1.871)	51.70 (2.035)
14	51.48 (2.027)	55.66 (2.191)
15	55.44 (2.182)	59.62 (2.347)

所有材料為  
"環保材料"  
2006.6.29  
RoHS

※備註：15Pin為特殊Pin數，下單時須有M.O.Q

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
3.96mm Wire-to-Board Housing	GONG	(公差)	R4			
	CHECKED(確認):	X.XX ± 0.25	UNIT:	R0	環保料	2006.03.20
	MANDY	X.X ± 0.5	mm	R1		2006.06.29
PART NO: (料號) CV-H3961-XX	APPROVAL(核准):	SCALE(比例):	SIZE:	R2	增加15Pin的尺寸	2006.10.13
DWG NO(圖號): 3960VH-XX	JOHNNY	FREE	A4	R3	補充※備註	2006.10.20
			SHEET:	R4	增加CCC料號, Pin數編碼統一	2014.08.28
			1/1			

**A****B****C****D****E**