
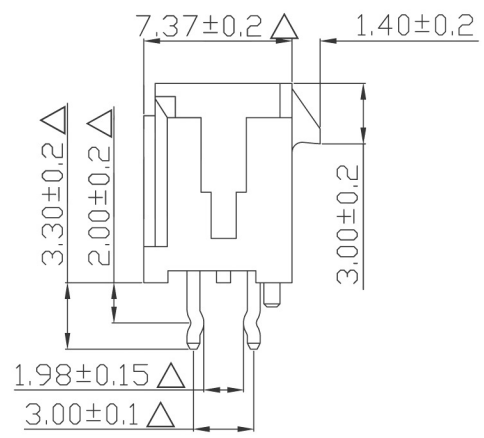


SPECIFICATIONS
 Current rating : 5A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25°C ~ +105°C
 Contact resistance : 10mΩ Max
 Insulation resistance : 1000MΩ Min
 Withstanding voltage : 1500 V AC/minute
 Finished : Tin-plated
 Housing Material : UL94 V-0
 Color : Black

PART NO. :
 CW-W300 (X) -2*XX-K(3.3)

Material
 P:PBT
 C:LCP
 N:Nylon-6T
 A:PA-46

NO. OF CONTACTS

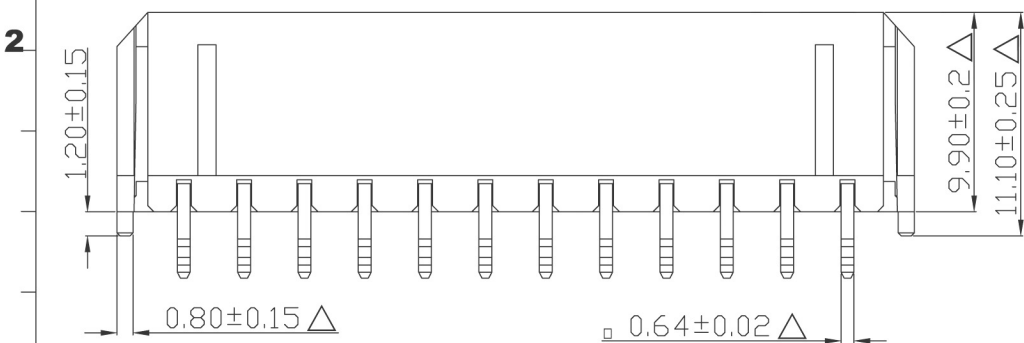

Circuits	Dimensions	
	A	B
2*01	—	6.65
2*02	3.00	9.65
2*03	6.00	12.65
2*04	9.00	15.65
2*05	12.00	18.65
2*06	15.00	21.65
2*07	18.00	24.65
2*08	21.00	27.65
2*09	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65

DESCRIPTION(內容): MX3.0 MICRO-FIT Wafer 180° Dip=3.3 打K (環保材料) PART NO: (料號) CW-W300X-2xXX-K(3.3) DWG NO(圖號): RDA141017-001	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差) .X .XXXX .XX .X° .XXX .XX°	REV: A/3 UNIT: mm SIZE: A4 SHEET: X/X	REV 1 2 3 4	DESCRIPTION △此符號表示重點管控尺寸 修改电气性能 变更为系列料号	DATE 2014.10.17 2014.10.24 2015.01.29
	CHECKED(確認): 黃炳秋	SCALE(比例): 1:XX				
	APPROVAL(核准): 鄧文廣					