
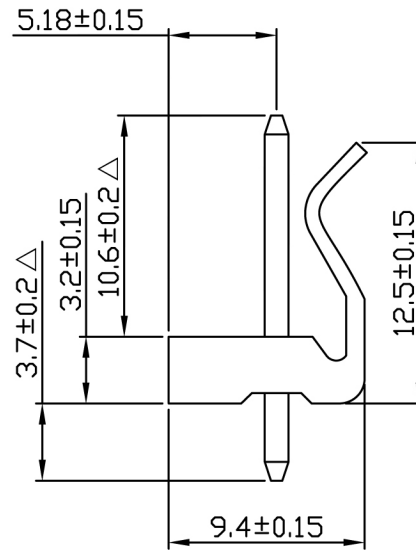


P. C. B Hole Layout

SPECIFICATIONS

Current rating : 7A AC, DC  
 Voltage rating : 250V AC, DC  
 Temperature range : -25° C ~ +85° C  
 Contact resistance : 10mΩMax  
 Insulation resistance : 1000MΩMin  
 Withstanding voltage : 1500 V AC/minute  
 Finished : Tin-plated  
 Housing Material : Nylon-66, UL94 V-2  
 Color : Translucence

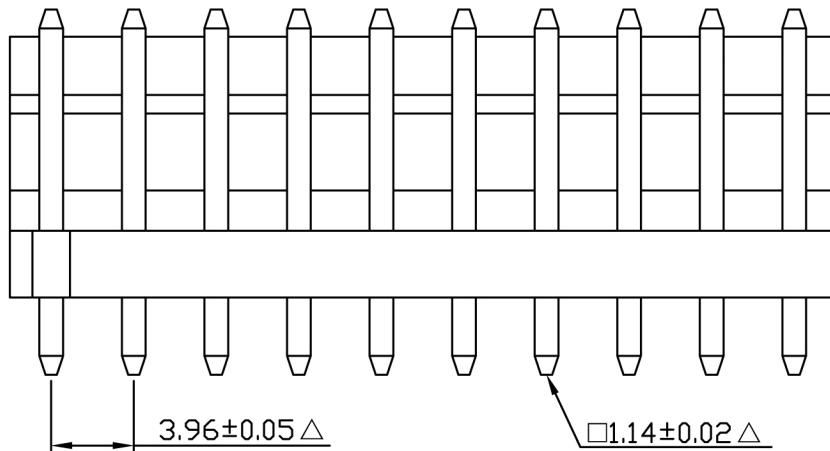

Circuits	Patr No.	Dimension mm	
		A	B
2	CW-W396-02	3.96	7.92
3	CW-W396-03	7.92	11.88
4	CW-W396-04	11.88	15.84
5	CW-W396-05	15.84	19.80
6	CW-W396-06	19.80	23.76
7	CW-W396-07	23.76	27.72
8	CW-W396-08	27.72	31.68
9	CW-W396-09	31.68	35.64
10	CW-W396-10	35.64	39.60
11	CW-W396-11	39.60	43.56
12	CW-W396-12	43.56	47.52
13	CW-W396-13	47.52	51.48
14	CW-W396-14	51.48	55.44
15	CW-W396-15	55.44	59.40
16	CW-W396-16	59.40	63.36
17	CW-W396-17	63.36	67.32
18	CW-W396-18	67.32	71.28
19	CW-W396-19	71.28	75.24
20	CW-W396-20	75.24	79.20

DESCRIPTION(內容):  
**MX 3.96mm Wafer 180° □=1.14**  
 (環保材料)

PART NO:  
 (料 號) CW-W396-XX

DWG NO(圖號):

DRAWN(製圖):  
 方婷

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:  
 (公差)

SCALE(比例):  
 1:XX

REV:  
 A/6

UNIT:  
 mm

SIZE:  
 A4

SHEET:  
 1/1

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	2006.08.29
2	(1D)增加產品顏色標注	2007.07.04
3	增加產品標注(5.18±0.15)	2010.08.03
4	更改特性	2010.12.03