





Specifications

Current Rating : 3A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25°C ~ +85°C
 Contact resistance : 10m Ω Max
 Insulation resistance : 1000M Ω Min
 Withstanding voltage : 1000 V AC/minute
 Pin Material : Brass
 Finished : Tin-plated
 Housing Material : Nylon-66, UL94 V-0
 Color : Ivory-white

Circuits	Part NO.	Dimension mm	
		A	B
2	CX-W250R-02	2.50	7.60
3	CX-W250R-03	5.00	10.10
4	CX-W250R-04	7.50	12.60
5	CX-W250R-05	10.00	15.10
6	CX-W250R-06	12.50	17.60
7	CX-W250R-07	15.00	20.10
8	CX-W250R-08	17.50	22.60
9	CX-W250R-09	20.00	25.10
10	CX-W250R-10	22.50	27.60
11	CX-W250R-11	25.00	30.10
12	CX-W250R-12	27.50	32.60
13	CX-W250R-13	30.00	35.10
14	CX-W250R-14	32.50	37.60
15	CX-W250R-15	35.00	40.10
16	CX-W250R-16	37.50	42.60
17	CX-W250R-17	40.00	45.10
18	CX-W250R-18	42.50	47.60
19	CX-W250R-19	45.00	50.10
20	CX-W250R-20	47.50	52.60

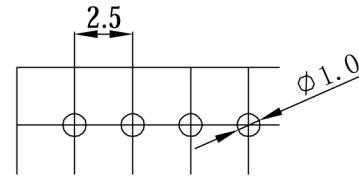

P. C. B. Hole Layout

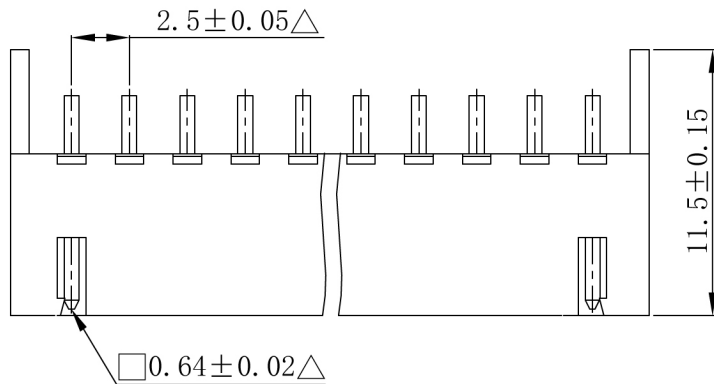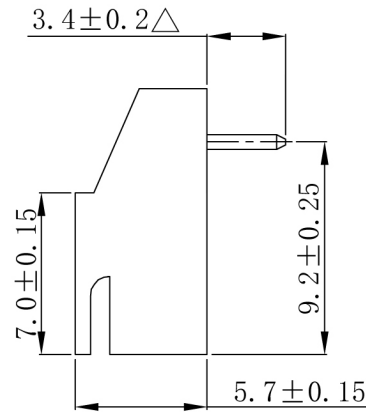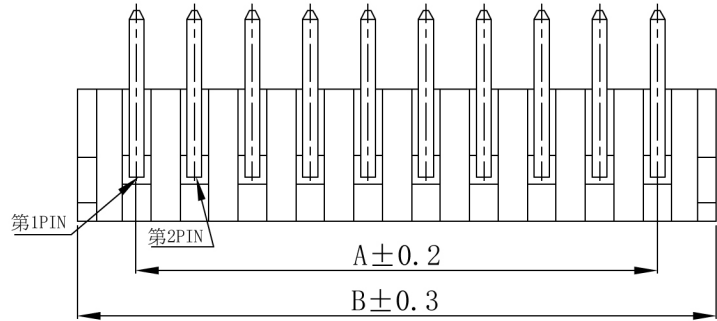

DESCRIPTION (內容):	DRAWN(製圖):	GENERAL TOLERANCE : (公差)	REV: A/5	REV	DESCRIPTION	DATE
XH 2.5mm Wafer 90° □=0.64(不打K) (環保材料)	李建安	.0 ±0.20 .00 ±0.15 .000 ±0.10	UNIT:	1	變更版本公差	2005.06.20
	CHECKED(確認): 李建安		mm	2	△此符號表示重點管控尺寸	2005.08.13
PART NO: (料號) CX-W250R-XX	APPROVAL(核准):	SCALE (比例):	A4	3	變更版本公差	2008.09.17
DWG NO(圖號):	邓文广	1:XX	SHEET: 1/1	4	變更注解	2011.09.19